


Characteristics

Made from non-latex, polychloroprene synthetic polymer, these new Pulse® CR exam gloves offer all of the benefits of natural rubber latex, with none of the allergen problems associated with latex. These exam gloves are the most comfortable gloves you'll ever wear! They're incredibly soft, unbelievably elastic, and yet they're still amazingly strong. Textured finish provides excellent wet or dry gripping ability. Aqua color.



**Exam Glove
Non-Sterile**

*Pulse®
CR Aqua*

**Chloroprene
Series 194**



PRODUCT DETAILS

SIZE	ITEM NO.	PACKAGING	DESCRIPTION
XS	194052	200 Gloves/box, 10 boxes/case	Gloves, Exam, Chloroprene, Non-Sterile, Powder-Free, Textured, Aqua
S	194102	200 Gloves/box, 10 boxes/case	
M	194202	200 Gloves/box, 10 boxes/case	
L	194302	200 Gloves/box, 10 boxes/case	
XL	194352	200 Gloves/box, 10 boxes/case	

Product Attributes

- Low Modulus
- Non-Latex
- Textured Finish

Benefits

- Softer, More Comfortable Fit
- No Risk of Latex Allergens
- Improved Wet/Dry Grip


Product Solutions You Trust

Specification Sheet



Pulse® CR Aqua

**Powder-Free
Chloroprene Exam Gloves**

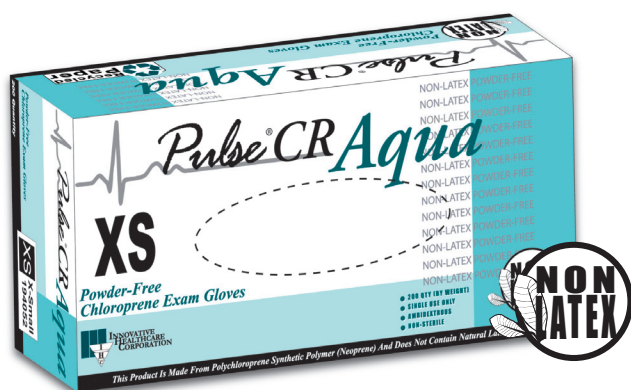

NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE
NON-LATEX POWDER-FREE

Pulse® CR is manufactured in compliance with multiple international standards, including the following:

Designation	Standard
ASTM D6977	Standard Specification for Polychloroprene Examination Gloves for Medical Application
ASTM D5151	Standard Test Method for Detection of Holes in Medical Gloves
ASTM F1671	Standard Test Method for Resistance of Materials Used in Protective Clothing to Penetration by Blood-Borne Pathogens

Average Length	Average Palm Thickness	Average Finger Thickness
9.5 in ± 240 mm	2.8 mil ± 0.07 mm	3.5 mil ± 0.09 mm

Tensile Strength & Elongation	Before Aging	After Accelerated Aging
Tensile Strength (Mpa)	15.9	20.9
ASTM Requirement Min. (Mpa)	14	14
Elongation (%)	817	732
ASTM Requirement Min. (%)	500	400

